

09-18-00

A

09/14/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this paper and the documents and/or fees referred to as attached therein are being deposited with the United States Postal Service on September 14, 2000 in an envelope as "Express Mail Post Office to Addressee" service under 37 CFR §1.10, Mailing Label Number EL631003374US, addressed to the Assistant Commissioner for Patents, Washington, DC 20231.

Attorney Docket No.: SMC1P009

First Named Inventor: POPOVIC

Mandy Franklin (signature and name)

UTILITY PATENT APPLICATION TRANSMITTAL (37 CFR. § 1.53(b))

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

[ ] Duplicate for fee processing

This is a request for filing a patent application under 37 CFR. § 1.53(b) in the name of inventors: Mirjana POPOVIC, Dieter SCHULZ

LOCATING NETWORK ECHOS

Application Elements:

- 08 Pages of Specification, Claims and Abstract
02 Sheets of informal Drawings
Combined Declaration and Power of Attorney
Separate Declaration

Accompanying Application Parts:

- Assignment and Assignment Recordation Cover Sheet (recording fee of \$40.00 enclosed)
Separate Power of Attorney by Assignee
37 CFR 3.73(b) Statement by Assignee
Information Disclosure Statement with Form PTO-1449
Copies of IDS Citations
Preliminary Amendment
Return Receipt Postcard
Small Entity Statement(s)
Other:

(Revised 01/00, Pat App Trans 53(b) Prov Priort)

Page 1 of 2

Claim For Foreign Priority



119.

Priority of UK Application No. 9921555.0 filed on September 14, 1999 is claimed under 35 U.S.C. §



The certified copy is enclosed.



The certified copy will follow.

**PLEASE DEFER FILING FEES AT THIS TIME**

General Authorization for Petition for Extension of Time (37 CFR §1.136)



Applicants hereby make and generally authorize any Petitions for Extensions of Time as may be needed for any subsequent filings. The Commissioner is also authorized to charge any extension fees under 37 CFR §1.17 as may be needed to Deposit Account No. 50-0388 (Order No. SMC1P009).



Please send correspondence to the following address:

**Customer Number 022434**

**BEYER WEAVER & THOMAS, LLP**

**P.O. Box 778**

**Berkeley, CA 94704-0778**

**Telephone (650) 961-8300**

**Fax (650) 961-8301**



**22434**

PATENT TRADEMARK OFFICE

Date:

SEPT 14, 2000

Steve D Beyer

**Steve D Beyer**

**Registration No. 31,234**

## LOCATING NETWORK ECHOS

## Field of the Invention

The present invention relates generally to communication networks and in particular to an echo cancelling system and method for cancelling echos in a communication path.

5

## Background of the Invention

Echo cancellers to cancel echos in a communication path are well known. A typical echo canceller generates a filter that models the transfer function of the echo signal path using a linear algorithm such as a least-mean-squared (LMS) algorithm. Network signals conveyed to the echo signal path are also conveyed to the echo canceller. The filter therein processes the network signals to generate an estimated copy of echo signals received from the echo signal path. The estimated echo signals and actual echo signals received from the echo signal path are subtracted. Differences between the estimated echo signals and the actual echo signals result in error signals, which are fed back to the echo canceller so that the echo canceller can converge to the correct transfer function.

When dealing with long delay networks, the echo signal path can change and can be different from call to call. As a result, an adaptive algorithm is required to allow the echo canceller to model adaptively the echo signal path.

20 Unfortunately, the longer the time window or delay of the echo signals that are required to be cancelled, the longer the adaptive algorithm takes to adapt to the correct transfer function.

In addition, as the total time window increases, the number of coefficients in the filter generated by the adaptive algorithm increases, requiring more processing power. Placing conventional echo cancellers in long delay networks to cancel echos from traditional networks such as public switched telephone networks (PSTNs) or private branch exchanges (PBXs) increases the complexity and cost significantly.

It is therefore an object of the present invention to provide a novel  
30 echo cancelling system and method and a novel echo locator.

-2-

**Summary of the Invention**

In accordance with one aspect of the present invention there is provided an echo cancelling system for cancelling echoes in a communication path comprising:

- 5 an echo locator coupled to said communication path to locate the positions of echo signals received from said communication path; and
- an echo canceller coupled to said communication path to cancel echo signals received therefrom, said echo canceller becoming active in regions corresponding to the positions of echo signals in response to said echo locator.

- 10 In accordance with another aspect of the present invention there is provided a method of cancelling echoes in a communication path comprising the steps:

- locating the positions of echo signals in said communication path; and
- activating an echo canceller only in regions corresponding to the
- 15 positions of the echo signals thereby to cancel echoes in said communication path.

In accordance with yet another aspect of the invention there is provided an echo locator to locate echoes in a communication path comprising:

- a first downsampler downsampling signals transmitted to said communication path and generating downsampled reference signals;
- 20 a second downsampler downsampling return signals received from said communication path and generating downsampled return signals; and
- an adaptive filter generating an aliased transfer function approximating that of said communication path to produce aliased estimated return signals in response to said downsampled reference signals, said adaptive filter subtracting the
- 25 aliased estimated return signals from said downsampled return signals to generate error signals, said error signals being fed back to said adaptive filter to adjust the transfer function thereof, said adaptive filter generating output corresponding to peaks in said transfer function thereby to signify the location of echoes in said return signals.

- 30 The present invention provides advantages in that since the position of echos in the echo signal time window are determined, the echo canceller can be made active only in those areas in the time window. As a result, a reduced number of filter

004750-633950

-3-

coefficients used to generate the filter modeling the echo signal path need to be active. This allows the echo canceller to adapt faster to changes in the echo signal path. In addition, by reducing the number of active filter coefficients, fewer processing cycles are required to generate the filter. Furthermore, the echo canceller is more robust in  
5 adverse conditions.

### **Brief Descriptions of the Drawing**

An embodiment of the present invention will now be described more fully with reference to the accompanying drawings in which:

10 Figure 1 is a schematic diagram of a conventional prior art echo canceller;

Figure 2 is a schematic diagram of an echo canceller and echo locator in accordance with the present invention;

Figure 3 is a schematic diagram of the echo locator of Figure 2; and

15 Figure 4 is a graph showing an echo signal received from an echo signal path.

### **Detailed Description of the Preferred Embodiment**

Turning now to Figure 1, a conventional echo canceller in parallel with  
20 a communication path 12 in which echo signals are generated is shown and is generally indicated to by reference numeral 10. The echo canceller 10 generates a filter modeling the transfer function of the echo signal path using a least-mean-squared (LMS) algorithm so that the echo canceller generates estimated echo signals that are the same as the echo signals received from the communication path 12. The  
25 estimated echo signals are subtracted 14 from the actual echo signals in an attempt to cancel the echo signals. The amount of cancellation is commonly referred to as ERLE. Differences between the estimated echo signals and the actual echo signals result in error signals. The error signals are fed back to the echo canceller 10 so that the echo canceller can attempt to converge to the correct transfer function and  
30 generate a filter which more closely models the echo signal path.

As mentioned previously, the algorithm executed by the echo canceller 10 takes longer to converge to the correct transfer function as the time window of

-4-

echo signals received from the communication path 12 increases. As a result, echo signals pass through the echo canceller 10.

To deal with the above, a network echo locator 30 in accordance with the present invention is provided and is used in conjunction with an echo canceller 32. As can be seen in Figure 2, the echo locator 30 is in parallel with the echo canceller 32. The echo locator 30 provides input to the echo canceller 32 which is used by the echo canceller to limit the number of active filter coefficients or taps during generation of the filter modeling the communication path 34.

Turning now to Figure 3, the echo signal locator 30 is better illustrated. As can be seen, the echo locator 30 includes a downsampler 40 receiving reference signals transmitted to the communication path 34 and downsampler 42 receiving return signals from the communication path 34. The downsampler 40 downsamples the transmitted reference signals by a factor of M without a downsampling filter while the downsampler 42 downsamples the return signals by the same factor of M without a downsampling filter. An adaptive filter 44 receives the downsampled reference and return signals and includes an LMS processor 46 executing an LMS algorithm. The LMS algorithm generates an aliased transfer function modelling the communication path 34 and processes the downsampled reference signals to produce estimated downsampled return signals. The estimated downsampled return signals are subtracted (block 48) from the downsampled return signals to generate feedback error signals 49, which are used to adjust the transfer function. The LMS processor 46 generates output signals corresponding to the peaks in the transfer function, which are conveyed to the echo canceller 32 to activate selected filter coefficients thereof.

The peaks in the aliased transfer function of the echo locator 30 represent the areas of active echoes in the communication path 34. Only these areas need to be active in the echo canceller 32 in order to cancel the echoes. For example, if  $M=4$  and the peaks in the aliased transfer function of the LMS processor 42 are at positions 3, 4 and 5 and 10, 11, and 12, then the filter coefficients or taps in the LMS algorithm of the echo canceller 32 which need to be made active by the echo locator 30 are:

$$\begin{aligned} 3 \times M &= 12 \text{ up to } 5 \times M = 20; \text{ and} \\ 10 \times M &= 40 \text{ up to } 12 \times M = 48. \end{aligned}$$

-5-

The remaining taps of the echo canceller are considered to be equal to zero and do not need to be used in the adaptation calculation or filtering of the echo canceller.

If desired, a weighting function can be applied to the taps in the echo canceller 32 based on the magnitude of the peaks in the aliased transfer function of the echo locator 30. In this case, higher peaks in the transfer function of the echo locator result in higher weightings applied to the corresponding taps in the echo canceller.

Turning now to Figure 4, a time window 50 for an echo signal is shown. As can be seen, within the time window, echo signals 52 are present in only two locations within the time window. In a conventional echo signal canceller, the filter generated by the echo canceller will be active over the entire time window. However, through use of the echo locator of the present invention, the echo canceller, which is responsive to the echo locator, is only active in the regions within the time window in which echo signals are present.

Although a preferred embodiment of the present invention has been described, those of skill in the art will appreciate that variations and modifications may be made without departing from the spirit and scope thereof as defined by the appended claims.

-6-

**We Claim:**

1. An echo cancelling system for cancelling echoes in a communication path comprising:
- 5 an echo locator coupled to said communication path to locate the positions of echo signals received from said communication path; and
- an echo canceller coupled to said communication path to cancel echo signals received therefrom, said echo canceller becoming active in regions corresponding to the positions of echo signals in response to said echo locator.
- 10
2. An echo cancelling system as defined in Claim 1, wherein said echo canceller includes a first adaptive filter including selectable filter coefficients, said echo locator activating selected filter coefficients of said first adaptive filter corresponding to the positions of echo signals received from said communication
- 15 path.
3. An echo cancelling system as defined in Claim 2, wherein said echo locator includes a second adaptive filter generating an aliased transfer function approximating that of said communication path, peaks in said transfer function being
- 20 used by said echo locator to activate said selected filter coefficients.
4. An echo cancelling system as defined in Claim 3 wherein said echo locator generates output signals corresponding to peaks in said transfer function, said output signals being applied to said echo canceller to activate selected filter
- 25 coefficients corresponding to said peaks, the magnitude of said output signals being dependent on the magnitude of said peaks.
5. An echo cancelling system as defined in Claim 4 wherein said first and second adaptive filters are LMS adaptive filters.
- 30
6. A method of cancelling echoes in a communication path comprising the steps:



locating the positions of echo signals in said communication path; and  
activating an echo canceller only in regions corresponding to the  
positions of the echo signals thereby to cancel echoes in said communication path.

5 7. The method of Claim 6 wherein said activating step further includes  
the step of activating selected filter coefficients of an adaptive filter in said echo  
canceller corresponding to the position of echo signals received from said  
communication path.

10 8. The method of Claim 7 further comprising the step of weighting the  
selected filter coefficients in dependence of the magnitude of echo signals received  
from said communication path.

15 9. An echo locator to locate echoes in a communication path comprising:  
a first downsampler downsampling signals transmitted to said  
communication path and generating downsampled reference signals;  
a second downsampler downsampling return signals received from said  
communication path and generating downsampled return signals; and  
20 an adaptive filter generating an aliased transfer function approximating  
that of said communication path to produce aliased estimated return signals in  
response to said downsampled reference signals, said adaptive filter subtracting the  
aliased estimated return signals from said downsampled return signals to generate  
error signals, said error signals being fed back to said adaptive filter to adjust the  
25 transfer function thereof, said adaptive filter generating output corresponding to peaks  
in said transfer function thereby to signify the location of echoes in said return  
signals.


10. An echo locator as defined in Claim 9 wherein said adaptive filter is an  
LMS adaptive filter.

-8-

**ABSTRACT**

An echo cancelling system for cancelling echoes in a communication path includes an echo locator and an echo canceller. The echo locator is coupled to the communication path and locates the positions of echo signals received from the communication path. The echo canceller is also coupled to the communication path and cancels echo signals received therefrom. During echo cancellation, the echo canceller becomes active in regions corresponding to the positions of echo signals in response to the echo locator.

00160-682960

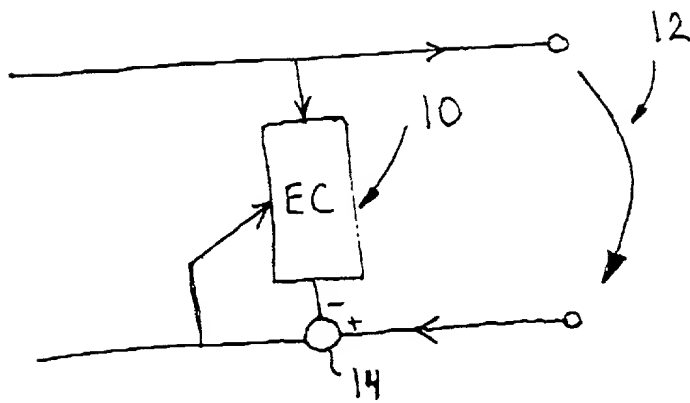

(Prior Art)

Fig. 1

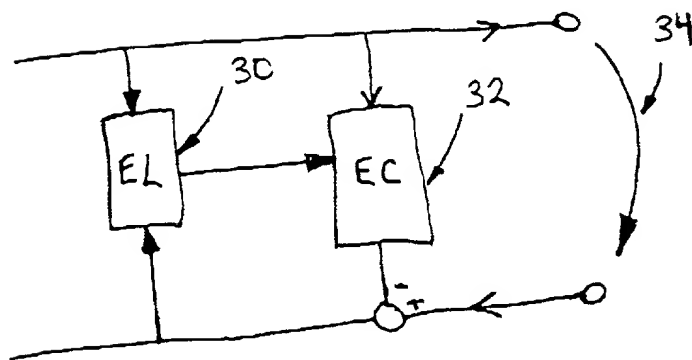


Fig. 2

004760-00000000

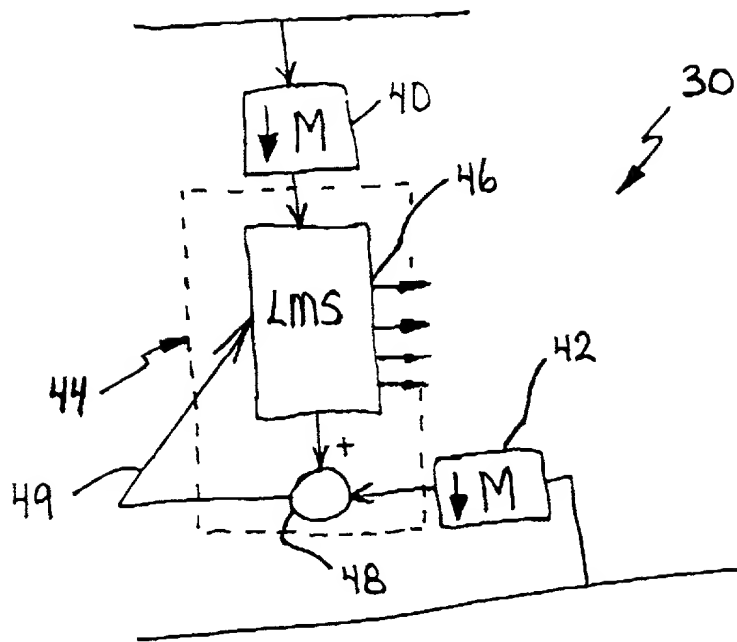


Fig. 3

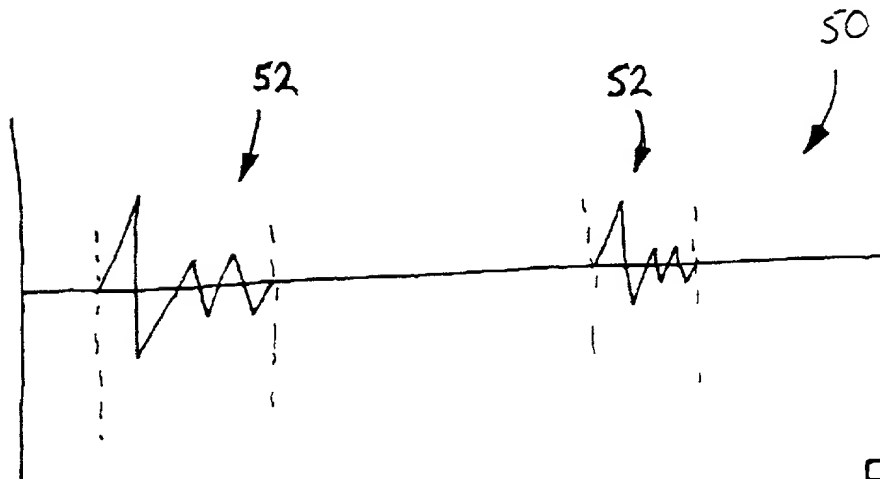


Fig. 4